

Additional Manual **PRO-RC** Software Update Rondo V2.x

The update of Rondo version 2.x needs an extra preparation which is described here. If your Rondo has already a version 3.x or higher, the normal update manual is valid without any restriction. Rondos with version 1.x need to be sent to the manufacturer as they need a hardware update before they can be updated by you.


General preparation

For safety reasons the motor of an electric driven model must be disconnected or disengaged during then update process. Please make sure the motor cannot start accidentally.

During the update process all settings will be deleted. It therefore makes sense, to note them before the update and re-enter them after the update.

Extra preparation

Before you can start the update according the update manual, you need to install a connection between Rondo ground and the connector in the bottom of Rondo. Only with this connection, the update will work! The simplest way to do this is to take a patch cable -like the ones which are delivered with Rondo- and plug it into one of the Rondo jacks. The brown wire is now connected to Rondo ground. Now take a pices of thin wire e.g. a paperclip or a very thin needle and put it into the free and of the patch cable at the position where the brown wire ends. Your Rondo should now look like the one on the picture to the right.

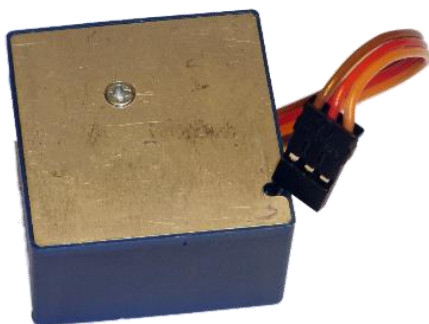

Turn around your Rondo and lead the wire about 10 mm into the whole in the bottom of Rondo and tilt it a bit so that the wire has contact to the PCB in the inner. Use a sticky tape to fix the connector of the patch cable to make sure the contact exists all over the update process. The result should look as the picture to the left shows.

This finalizes the extra preparation, now you can update the Rondo according the normal update manual. After the update, this connection must be removed!